




KIP 71 SERIES

SPECIFICATIONS

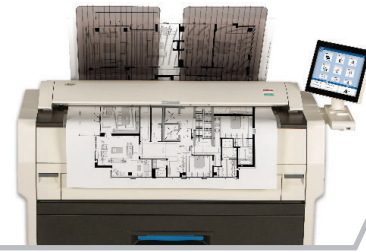

General

Description	Monochrome wide format print/copy/scan with color scanner
Type	Electrophotography (LED) with organic photoconductor (OPC) and closed toner system
Range of Productivity	6 D or 4 D per minute / 360 or 240 prints per hour
Warm Up Time (from cold)	Less than 2 minutes from standby
Configurations	MFP
Roll Options	2 Roll or 1 Roll
Output Delivery	Top / Optional Rear
Dimensions	63" (w) x 28" (d) x 59" (h) / 1590 mm x 700 mm x 1510 mm
Weight	538 lb. / 244 kg
Electrical Requirements	120V plus/minus 10%, 50/60Hz, 12A
Power Consumption (Standby)	500W
Power Consumption (Printing)	1,100W

Printer

Print Resolution	600 dpi x 2400 dpi
Roll Capacity	2 Roll or 1 Roll
Output Sizes Width	11" - 36"
Output Sizes Length	20' / 6 m (standard), 500'/150 m based on media validation
Paper Weight	Bond 18-24 lb., Vellum/Translucent Bond 18-20 lb., film 3.5 - 4 mil
Media Type	Bond / Vellum / Film


Controller

Controller Type	KIP System K Controller with Windows 7 Embedded
Memory	2GB DDR3 Standard - Upgradable to 4 GB
Hard Drive	Minimum 320 GB - Unlimited Upgrade
Supported File Type	DWF, PDF, PDF-A, HPGL 1/2, HP-RTL, Calcomp 906/907, CALS Group 4, TIFF Group 4, CIT/TG4, Grayscale TIFF, TIFF Packbits, PNG, JPEG

Scanner

Scanner Type	CIS
Scan Resolution	600 dpi
Scan Format	TIFF, Multipage TIFF, PDF, PDF-A, Multipage PDF, DWF, JPEG
Scan Destination	Local USB (removable media), Mailboxes (local), FTP, SMB Cloud: Google Drive/Dropbox/Box/OneDrive/SharePoint
Original Size Width	11" - 36" / 210 mm to 914 mm
Original Thickness	0.05 mm - 1.60 mm (image quality over 0.25 mm not guaranteed)

KIP 71 SERIES

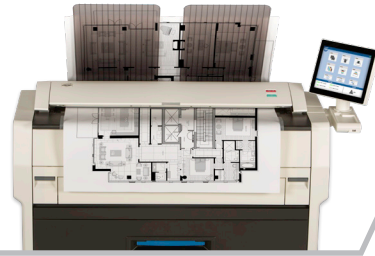


INSTALLATION


Space, Electrical, and Environmental Requirements

Weight	538 lb. / 244 kg
Dimensions	63" (w) x 28" (d) x 59" (h) / 1590 mm (w) x 700 mm (d) x 1510 mm (h)
Electrical (Dedicated)	120V +/- 10%, 50/60 Hz, 15 amp or higher
Electrical Receptacle	Nema 5-15 R
Max. Power Consumption	1,100 W (printing), 500 W (standby)
Acoustic Noise	Idle: max. 50 db Printing: max. 57 db
Room Temperature	50-86°F (10-32°C)
Room Humidity	15-85% (non condensing)


Spatial Requirements (top view not to scale)

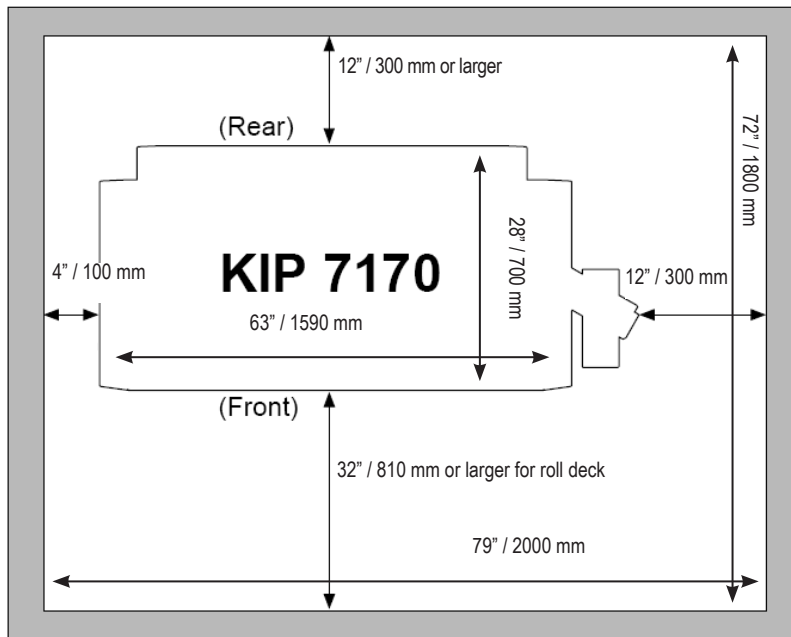

Spatial Requirements with KIPFold 1000 (top view not to scale)

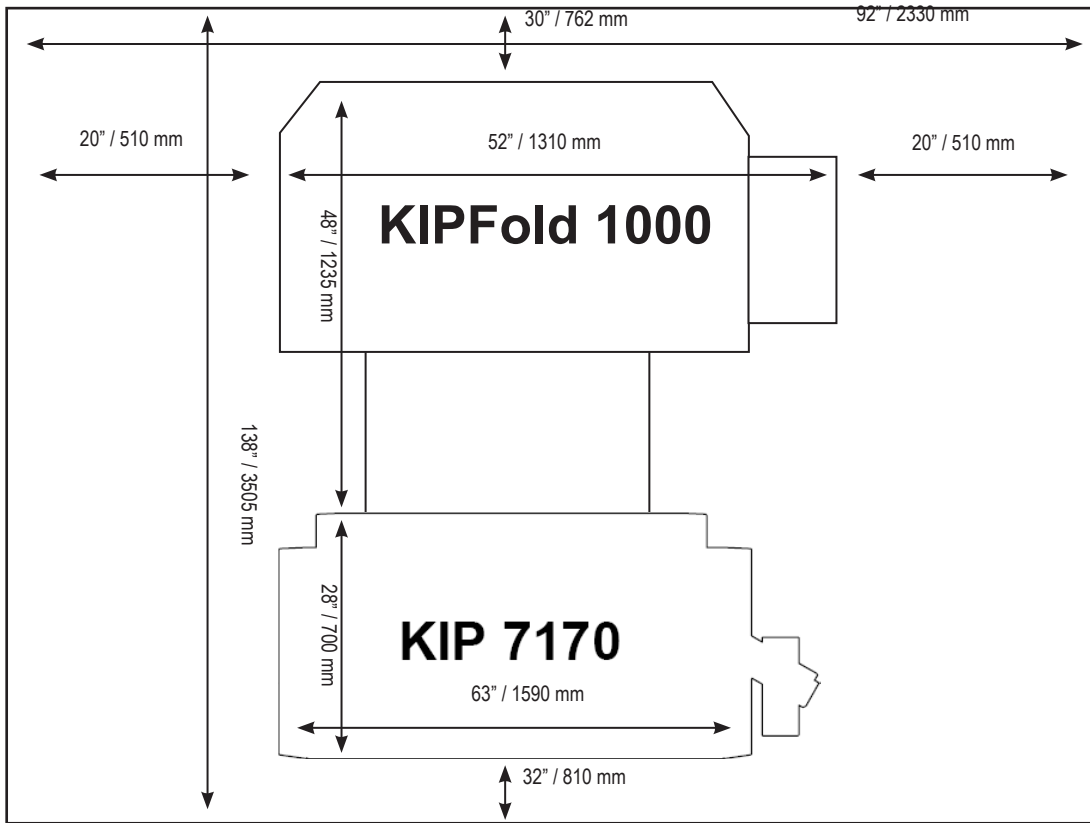

Spatial Requirements with KIPFold 2800 (top view not to scale)

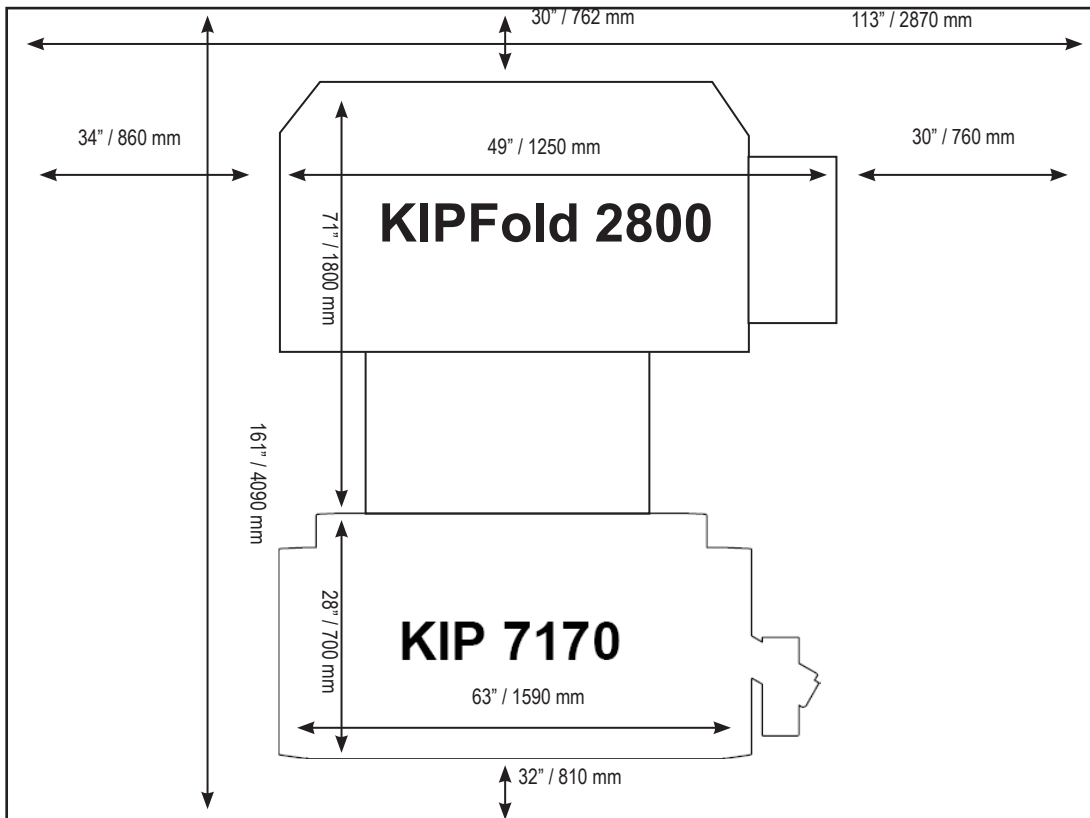





KIP 71 SERIES

CONFIGURATIONS & PRODUCTIVITY


KIP 7171

- 240 D Size Prints Per Hour
- 1 Roll

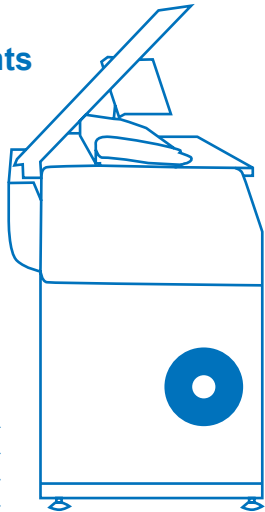



KIP 7171

- 360 D Size Prints Per Hour
- 1 Roll





KIP 7172

- 240 D Size Prints Per Hour
- 2 Rolls

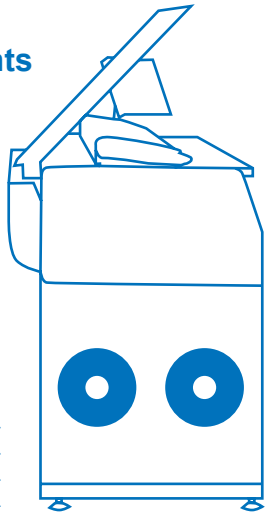

KIP 7172

- 360 D Size Prints Per Hour
- 2 Rolls

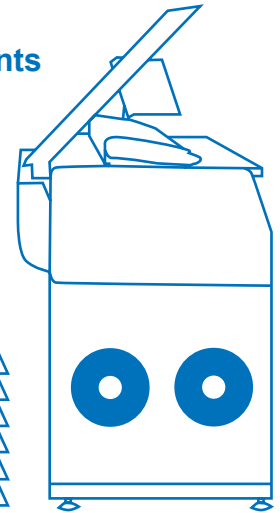

COPYSTAR

KYOCERA TECHNOLOGY

KYOCERA Document Solutions America, Inc.
Headquarters: 225 Sand Road, Fairfield, NJ 07004-0008, USA
©2019 KYOCERA Document Solutions America, Inc.