



## KIP 75 SERIES

### SPECIFICATIONS



#### General

Description	Monochrome wide format print/copy/scan with color scanner
Type	Electrophotography (LED) with organic photoconductor (OPC) and closed toner system
Range of Productivity	10 D or 8 D per minute / 600 or 480 prints per hour
Warm Up Time (from cold)	Less than 2 minutes from standby
Configurations	Printer / MFP
Roll Options	2 Roll or 4 Roll
Output Delivery	Top / Optional Rear
Dimensions	63" (w) x 29" (d) x 63" (h) / 1600 mm x 720 mm x 1600 mm
Weight	MFP (4 Roll) 624 lb. / 283 kg   Printer (4 Roll) 587 lb. / 266 kg
Electrical Requirements	220V-240V +6% or -10%, 50/60Hz, 13A
Power Consumption (Standby)	430W
Power Consumption (Printing)	< 1,500W

#### Printer

Print Resolution	600 dpi x 2400 dpi
Roll Capacity	2 Roll or 4 Roll
Output Sizes Width	11" - 36"
Output Sizes Length	20' / 6 m (standard), 500'/150 m based on media validation
Paper Weight	Bond 18-24 lb., Vellum/Translucent Bond 18-20 lb., film 3.5 - 4 mil
Media Type	Bond / Vellum / Film

#### Controller

Controller Type	KIP System K Controller with Windows 7 Embedded
Memory	2GB DDR3 Standard - Upgradable to 4 GB
Hard Drive	Minimum 320 GB - Unlimited Upgrade
Supported File Type	DWF, PDF, PDF-A, HPGL 1/2, HP-RTL, Calcomp 906/907, CALS Group 4, TIFF Group 4, CIT/TG4, Grayscale TIFF, TIFF Packbits, PNG, JPEG

#### Scanner

Scanner Type	CIS / CCD
Scan Resolution	600 dpi
Scan Format	TIFF, Multipage TIFF, PDF, PDF-A, Multipage PDF, DWF, JPEG
Scan Destination	Local USB (removable media), Mailboxes (local), FTP, SMB Cloud: Google Drive/Dropbox/Box/OneDrive/SharePoint
Original Size Width	11" - 36" / 210 mm to 914 mm
Original Thickness	0.05 mm - 1.60 mm (image quality over 0.25 mm not guaranteed)

# KIP 75 SERIES




## INSTALLATION

### Space, Electrical, and Environmental Requirements


Weight	MFP (4 Roll) 624 lb. / 283 kg   Printer (4 Roll) 587 lb. / 266 kg
Dimensions	63" (w) x 29" (d) x 63" (h) / 1600 mm x 720 mm x 1600 mm
Electrical (Dedicated)	220V-240V +6% or -10%, 50/60Hz, 13A
Electrical Receptacle	Nema 6-20 R
Max. Power Consumption	< 1,500W (printing), 430 W (standby)
Acoustic Noise	Idle: max. 50 db Printing: max. 57 db
Room Temperature	50-86°F (10-32°C)
Room Humidity	15-85% (non condensing)

### Spatial Requirements (top view not to scale)

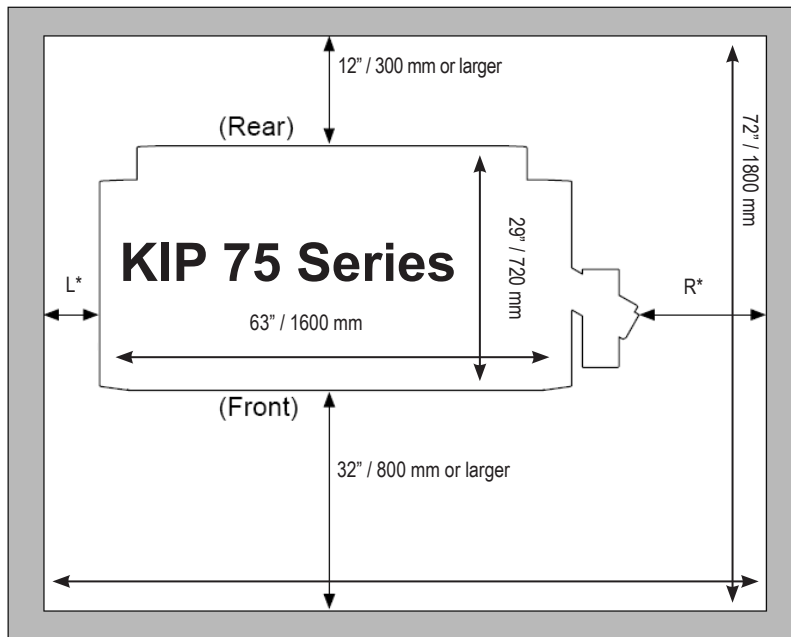


\* L + R = 14" / 350 mm or larger  
 (R must be larger than L)  
 (L = 2" / 50 mm or larger)

Spatial Requirements with KIPFold 1000 (top view not to scale)

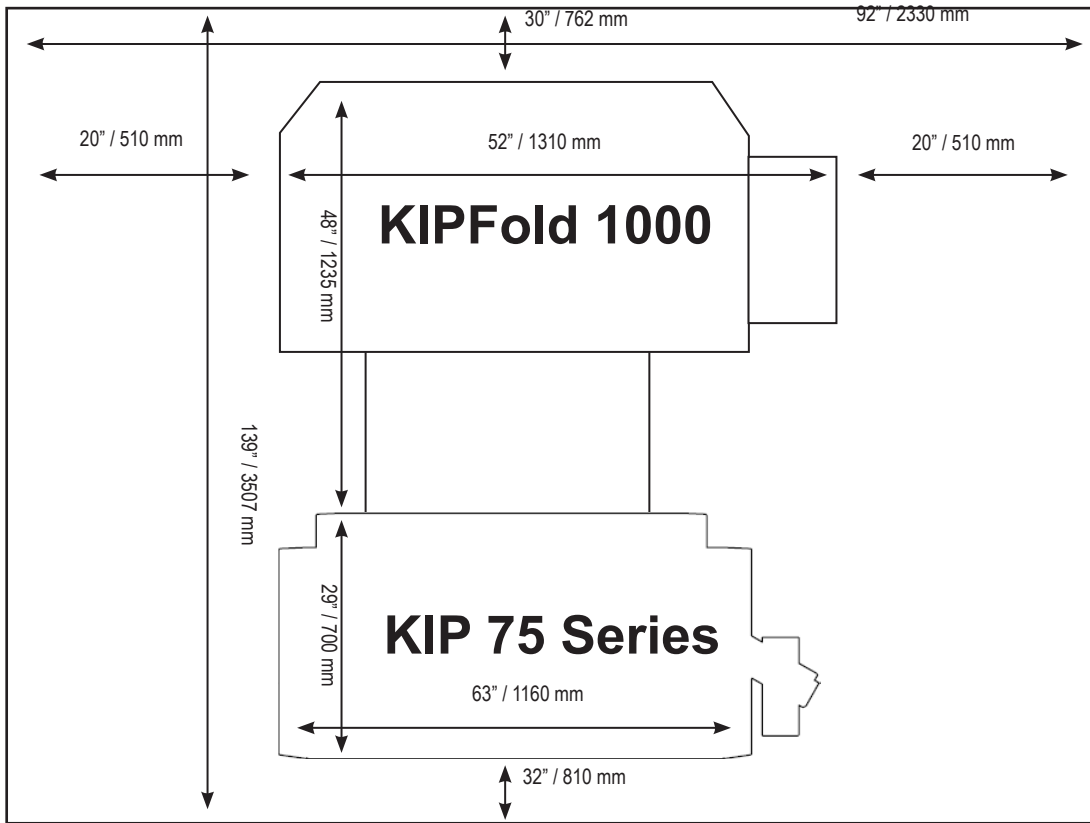


Spatial Requirements with KIPFold 2800 (top view not to scale)

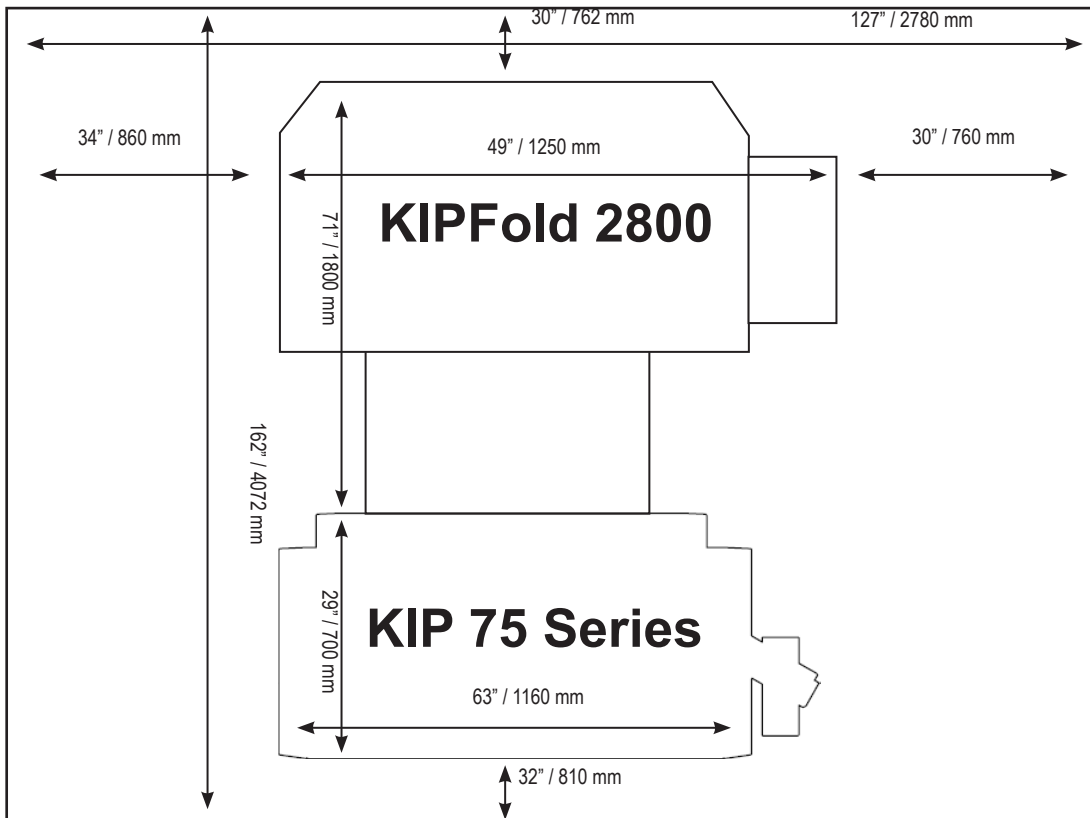




# KIP 75 SERIES


## CONFIGURATIONS & PRODUCTIVITY



480 PRINTS PER HOUR




KIP 7572 Printer




KIP 7574 Printer




600 PRINTS PER HOUR




KIP 7572 Printer




KIP 7574 Printer




KIP 7582 MFP CIS Scanner



KIP 7584 MFP CIS Scanner



KIP 7582 MFP CIS Scanner



KIP 7584 MFP CIS Scanner

KIP 7592 MFP CCD Scanner\*

KIP 7594 MFP CCD Scanner\*

KIP 7592 MFP CCD Scanner\*

KIP 7594 MFP CCD Scanner\*

\*Requires Dual Footprint Scanner Stand

# COPYSTAR



KYOCERA TECHNOLOGY

KYOCERA Document Solutions America, Inc.  
Headquarters: 225 Sand Road, Fairfield, NJ 07004-0008, USA  
©2019 KYOCERA Document Solutions America, Inc.